arXiv:cond-mat/0505231v1 [cond-mat.soft] 10 May 2005

Constant rate shearing on two dimensional cohesive disks

N. Olivi-Tran[1], O. Pozo[2], N. Fraysse[2]

[1] *SPCTS, UMR-CNRS 6638, Ecole Nationale Superieure de Ceramiques Industrielles, 47 av. A.Thomas, 87065 Limoges cedex, France*

[2] *LPMC, UMR-CNRS 6622, Parc Valrose, Universite de Nice Sophia Antipolis, 06108 Nice cedex 2, France*

(Dated: February 2, 2008)

Abstract

We performed two-dimensional Molecular Dynamics simulations of cohesive disks under shear. The cohesion between the disks is added by the action of springs between very next neighbouring disks, modelling capillary forces. The geometry of the cell allows disk-disk shearing and not disk-cell wall shearing as it is commonly found in literature. Does a stick-slip phenomenon happen though the upper cover moves at a constant velocity, i.e. with an infinite shearing force? We measured the forces acted by the disks on the upper cover for different shearing rates, as well as the disk velocities as a function of the distance to the bottom of the cell. It appears that the forces measured versus time present a periodic behavior,very close to a stick slip phenomenon, for shearing rates larger than a given threshold. The disks' collective displacements in the shearing cell (back and ahead) is the counterpart of the constant velocity of the upper cover leading to a periodic behavior of the shear stress.

PACS numbers: 81.05.Rm , 83.80.Fg , 83.10.Rs

I. INTRODUCTION

It frequently happens in nature that a system under continuous driving force responds in an intermittent way. Time intervals when the system is at rest and potential energy is accumulated alternate with active periods, when the system relaxes and potential energy is decreased. Since the simplest interaction leading to such behaviour is friction between two moving objects, these phenomena are called stick slip processes. Since one of the dominating interactions in granular materials is friction among the grains, it is not surprising that dense granular materials exhibit various stick slip phenomena.

Cohesion is generally put into a granular system by the mean of a liquid added to the grains. The presence of cohesion adds a new dimension to the underlying physics of granular materials. Experimentally and numerically, the physics of humid granular media has only begun in the late 90's [1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15] .

Here we will study numerically a two dimensional shearing cell containing mono-disperse cohesive disks. The cohesion in our model is very weak: in comparison, this cohesion may be experimentally obtained by the addition of an undersaturated water vapor atmosphere surrounding spherical beads. Hence, cohesion here is very different from that obtained with addition of macroscopic quantities of liquid. In this cell, the shearing rate is constant, i.e. the shearing driving force is infinite. Thus, the system as a whole can not be at rest. We will analyze the behaviours of our two-dimensional cohesive disks, and study the shear stress as a function of time, with a Molecular Dynamics model [12, 13] of the experiment in order to answer the question: does a stick slip phenomenon happen in cohesive disks dragged with an infinite shearing force?

II. NUMERICAL MODEL

The model we used here is a version of Molecular Dynamics for granular flow with cohesion in a two-dimensional shearing cell [12, 13]. Particles are modeled as N disks that have equal density $d = 2.2g.cm^{-2}$ and diameters $d = 0.2mm$.

The only external force acting on the system results from gravity, $g = 981cm.s^{-2}$. The particle-particle and particle-wall contacts are described in the normal direction (i.e. in the particles' center-center direction) by a Hooke-like force law. The normal force is written:

$$\mathbf{f}_n(i,j) = (-Yr_{eff}[\frac{1}{2}(d_i + d_j) - |_{\mathbf{r}i,j}|] + \gamma\frac{m_{eff}(\mathbf{v}_{i,j}.\mathbf{r}_{i,j})}{r_{eff}|\mathbf{r}_{i,j}|})\frac{\mathbf{r}_{i,j}}{|\mathbf{r}_{i,j}|} \quad (1)$$

where Y is the Young modulus of the solid, r_{eff} (m_{eff}) stands for the effective radius (mass) of the particles i and j, $\mathbf{v_{ij}} = \mathbf{v_i} - \mathbf{v_j}$ is the relative velocity of particle j towards particle i. d_i (resp. d_j) is the diameter of particle i (resp. j) and $\mathbf{r_{ij}}$ points from particle i to particle j. γ is a phenomenological dissipation coefficient.

We model the static friction force between particles by putting a virtual spring at the point of first contact. Its elongation is integrated over the entire collision time and set to zero when the contact is lost. The maximum possible value of the restoring force in the shear direction (i.e. in the plane perpendicular to the normal direction), according to Coulomb's criterion, is proportional to the normal force multiplied by the friction coefficient μ. It gives a friction force $\mathbf{f_s}(i,j)$ which is written:

$$\mathbf{f}_s(i,j) = -sign(f_f(i,j))min(f_f(i,j), \mu|f_n(i,j)|)\mathbf{s} \quad (2)$$

$$\mathbf{f}_f(i,j) := -\int(\dot{r}_i - \dot{r}_j)\mathbf{s}dt \quad (3)$$

where s stands for the unit vector in the shear direction. When a particle collides with the cylinder wall, the same forces (1) and (2) act with infinite mass and radius for particle j.

Capillary forces were modelled by adding a spring force to the normal force when particles are in contact:

$$f_{cap} = Kr_{eff}\frac{1}{2}(d_i + d_j) \quad (4)$$

where K is the corresponding spring constant, which depends on the surface tension and on the viscosity of the liquid. When the distance between the surface of the particles is lower than 10 % of the diameter of the smallest particle, the value of the spring constant is multiplied by the distance between the particles. This additive force is set to zero when the elongation of the virtual spring reaches a maximum length of 10% of the smallest particle diameter.

This cohesive force is a good model for capillary forces between beads with nanoasperities: capillary bridges are then located between two asperities belonging to two different beads or between one asperity of one bead and one relatively flat surface of the other bead. Therefore,

the attractive force increases with an increasing amount of liquid rendering our spring model for a cohesive force relevant.

The disks are put in a shearing cell with blades, one can see an example of this shearing cell in Figure 1. Periodic boundary conditions are imposed on the left and right hand side of the cell. Shear is applied on the disks by translating the upper cover at constant velocity, whatever the resistance to translation of the granular medium. The upper cover of the cell is allowed to undergo a vertical shift, the magnitude of this shift depending on the weight of this upper cover, on the velocity of the upper cover and on the disks assembly dilation.

III. RESULTS AND DISCUSSION

The parameters of our computations were the followings: the velocity of the upper cover was $v = 0.2mm/s$ and the weight of the cover was equal to $= 0.552g$, the mass of one disk being equal to $2.76.10^{-3}g$. The length of the cell was $L = 8mm$ and the height of the blades was $h = 1mm$. We used $N = 720$ disks. The dissipation coefficient was equal to 0.7, the Young modulus was $Y = 2020g.s^{-2}$ and the spring constant was $K = 41.4g.s^{-2}$. Our model represents mesoscopic beads (i.e. larger than particles in a powder) with a very weak cohesive force, hence it is different from models with strong cohesion. Hence, the quantity of disks used here is sufficient to analyze their behavior on a mesoscopic level.

We computed the total force acted on the upper cover by the disk assembly as a resistance to shear. For this, we added only the horizontal coordinates of the forces acting on the cover. This total force is similar to a stress. In Figure 2, one can see an example of the evolution of this total force as a function of time. The signal has been saved only when the permanent regime was obtained, when the height of the cover and the mean signal were steady. This signal appears to be very noisy: experiments with a shearing cell with blades lead to similar irregular signals (see [16]). Anyway, it is very similar to a shear stress signal in a stick slip phenomenon. We performed a direct Fourier transform on our signal, no characteristic peak appears for this shearing rate which is the lowest that we tested. Hence, the stress signal is not periodic. The stress signal becomes periodic for shearing rates larger than $8mm/s$ and up to $120mm/s$, from Fourier analysis of the stress signals corresponding to the these shearing rates in our simulations.

In order to understand the origin of the intermittent signal, we made an analysis of the

internal geometrical structure i.e. the locations of the disks during shearing in the cell.

In Figure 3 one can see the density of disks as a function of the distance (in disk diameters) to the bottom of the cell. We computed this density for two shearing rates: $v = 0.2mm/s$ and $v = 120mm/s$. For $v = 0.2mm/s$, it appears that the disks have a two dimensional crystalline structure: we observe periodic peaks in the density of disks. In the intervals between the peaks, the density increases slowly as a function of the distance to the bottom. All this means that the disks are structured in layers. For $v = 120mm/s$ this layered structure is also present but with lower densities (for each layer). For this high shearing rate, the layered structure disappears at 11 disks diameters from the bottom, and from then on decreases slightly. While for the lower velocity, the layered structure is maintained up to 16 disks diameters from the bottom, and decreases only at a distance to the top corresponding to the presence of the blades. These layered structures are a consequence of the dimension of space: two-dimensional. Indeed, the disks try to lower their resistance to shear and hence take place in a layered structure where the layers are parallel to the shearing force.

Let us compare the structure of the disks and the velocities of disks inside the cell. For that we took a snapshot of the instantaneous horizontal velocities of the disks at a given time t of the permanent regime. Figure 4 is this snapshot for a shearing rate $v = 0.2mm/s$ and Figure 5 is the snapshot for a shearing rate $v = 120mm/s$.

Let us examine Figure 4 in the light of Figure 3. Both figures have been set up with a shearing rate $v = 0.2mm$. In Figure 4, one can see that there remains the layered structure of Figure 3: close to the bottom of the cell (close to 0 in disks diameters) the velocities of the disks are periodically high, for distances up to 5 disk diameters from the bottom. There does not appear clearly a shearing band: the velocities of the disks increases slowly and regularly from abscissa 5 to abscissa 25. What is interesting to see is that the disks undergo negative and positive velocities, that means that the disks follow the shear direction and also the inverse direction. This happens near the bottom of the cell but also in the region of the blades. This is a consequence of the cohesion: when two disks collide, due to the spring linking them, these two disks undergo a periodic oscillation backward and forward. As all neighbouring disks are related by springs, there are collective oscillations of the disks inside one layer. These collective horizontal oscillations disappear when the layered structure disappears.

Now, if we look at Figure 4 and Figure 3. There are no more collective horizontal oscil-

lations because of the high value of the shearing rate ($v = 120mm/s$). It appears clearly a shearing band were the velocities of the disks increase regularly form almost zero to the value of the shearing rate. This shearing band has a width of 10 disk diameters.

The question remaining is: is there here a stick slip phenomenon with a constant shearing rate i.e. a infinite shearing force? In the light of the results that we obtained we can say that the disks try to decrease their resistance to shear by arranging themselves in layered structures parallel to the shearing direction. Furthermore, due to the cohesion given by springs between very next neighbours, the disks undergo small oscillations, in the direction of the shear and in its inverse.

The disks interact by the way of springs. So, we may say that we obtained a stick slip phenomenon in an assembly of disks put in a two-dimensional shearing cell. The stress signal that we obtained is the result of a sticking stage, when the springs linking our disks enlarge and the potential energy increases. The slip stages correspond to the periods where the springs relax and the potential energy is released.

This is a mean behavior, and one cannot say whether all springs relax at the same times. From our Fourier analysis of the stress signal, we can say that, for $v < 8mm/s$ (no characteristic peak in the Fourier curve) the relaxing and enlarging of the springs are not correlated: the stress signal is non-periodic. While for $8mm/s < v < 120mm/s$, a characteristic peak appears in the Fourier signal, the relaxing and enlarging of the springs are correlated in time, and the stress signal is periodic.

We computed from this Fourier transform the characteristic frequencies of the stick slip signal for $8mm/s < v < 120mm/s$ and for two dimensions of the simulation box, as a function of the shearing rate. The first dimension corresponds to the preceding computations, i.e. width $8mm$ and height of the blades $1mm$ with 720 disks. The second dimensions are: width $12mm$ and height of the blades $1.5mm$ with 1080 disks. Results are shown in fig.6. We see in that figure that the stick slip signal frequency depends on the dimensions of the simulation box. As we used springs to model cohesion in the bulk of our particles, we can say that the characteristic frequencies of the oscillations of the assembly of springs depend hence on the dimensions of the simulation box, like the frequency of a unique oscillator in a box of variable dimensions, even if we used periodic boundary conditions.

The characteristic frequencies depend also linearly on the shearing rate. This is the signature that the dissipation of energy as a function of time is small compared to the shearing

rate: the amount of energy brought by the constant shearing rate counterbalances the loss of energy due to dissipation when two particles overlap. Indeed, during each stick event, energy is accumulated by the way of the elasticity of the disks and inside the springs (potential energy); as dissipation is counterbalanced by the energy brought by the constant shearing rate, the assembly of springs behaves as a unique spring with no dissipation.

IV. CONCLUSION

We computed the behavior of two-dimensional disks with weak cohesion in a shearing cell with blades. Though the shearing rate is constant, we observe a typical stick slip stress signal. As the cohesion is added by the way of springs linking very next neighbouring disks, we can say that the stick stage corresponds to a collective enlargement of all springs where potential energy is accumulated. The slip stage results from the relaxing of the springs. Our stress signal becomes periodic for shearing rates values larger than a given threshold. The characteristic frequencies of the stick slip signal depend on the dimensions of the simulation box. As the cohesion between the particles has been modelled by springs, we can say that the whole assembly of interacting particles behave as a global unique spring. Hence each characteristic frequency depend on the shearing rate. Moreover, as the shearing rate is constant , the amount of energy necessary to counterbalance dissipation is always adequate, leading to a linear evolution of the frequencies with shearing rate.

---

[1] Albert R, Albert I, Hornbaker D, Schiffer P and Barabasi AL*Phys. Rev. E* **56** (1997) R6271

[2] Alonso JJ, Hovi JP and Herrmann HJ *Phys. Rev. E* **58** (1998) 672

[3] Barabasi AL,Albert R and Schiffer P *Physica A* **266** (1999) 366

[4] Bocquet L, Charlaix E, Ciliverto S and Crassous J *Nature* **396** (1998) 735

[5] Fraysse N, Thome H and Petit L , In Behringer RP and Jenkins JT (Eds.) *Powder and Grains 1997* Rotterdam; Balkema AA

[6] Fraysse N, Thome H and Petit L *Eur. Phys. J. B* **11** (1999) 615

[7] Halsey TC and Levine AJ *Phys. Rev. Lett.* **80**(1998) 3141

[8] Hornbaker DJ, Albert R, Albert I, Barabasi AL and Schiffer P *Nature* **387** (1997) 765

[9] Mason TG, Levine AJ, Ertas D and Halsey TC *Phys. Rev. E* **60** (1999) 50 44

[10] Nase ST,Vargas WL, Abatan AA, McCarthy JJ *Powder Techn.* **116** (2001) 214

[11] Nedderman RM ,Statics and kinematics of granular materials, (Cambridge,1992, Cambridge Univ. Press)

[12] Olivi-Tran N, Fraysse N, Girard P, Ramonda M and Chatain D *Eur. Phys. J. B* **25** (2002) 217

[13] Olivi-Tran N, Pozo O and Fraysse N *Model. and Simul . in Mat. Sci. and Eng.***12** (2004) 671

[14] Restagno F,Bocquet L and Charlaix E *Eur. Phys. J. E* **14** (2004) 177

[15] Samadani A and Kudrolli A, *Phys. Rev. Lett.* **85** (2000) 5102

[16] Pozo O, Fraysse N and Olivi-Tran N *Powder and Grains 2005* to appear

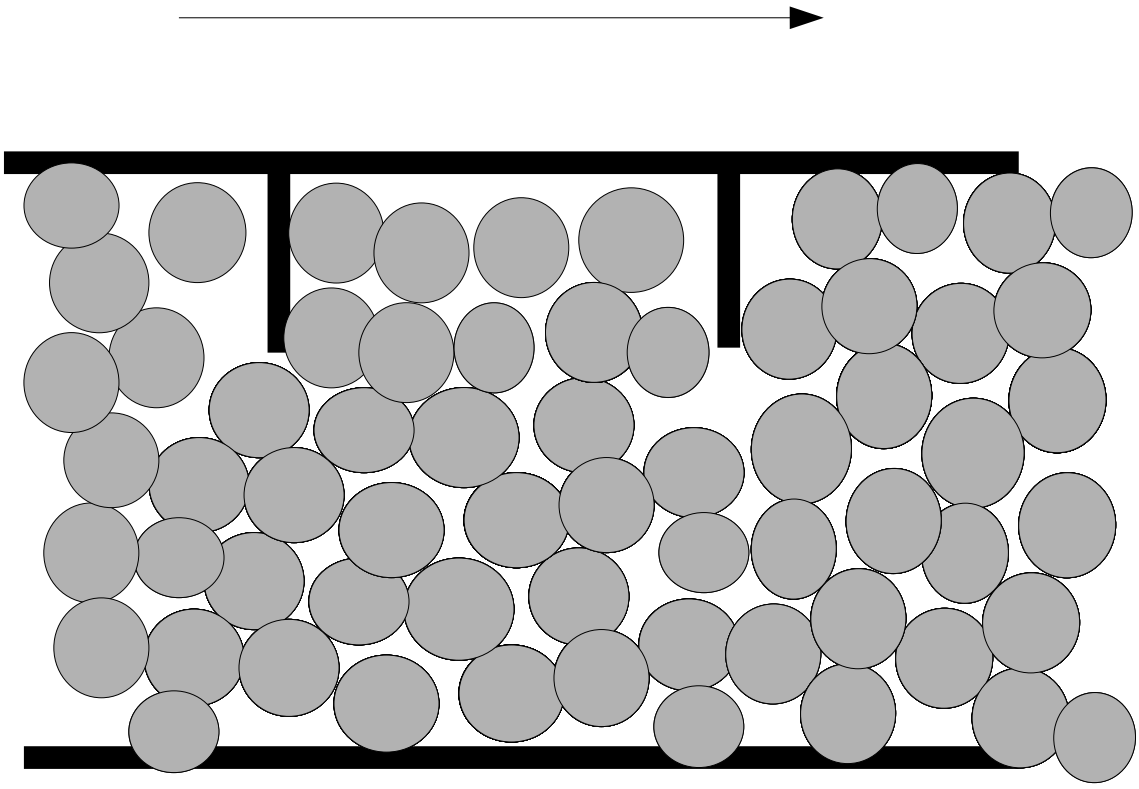

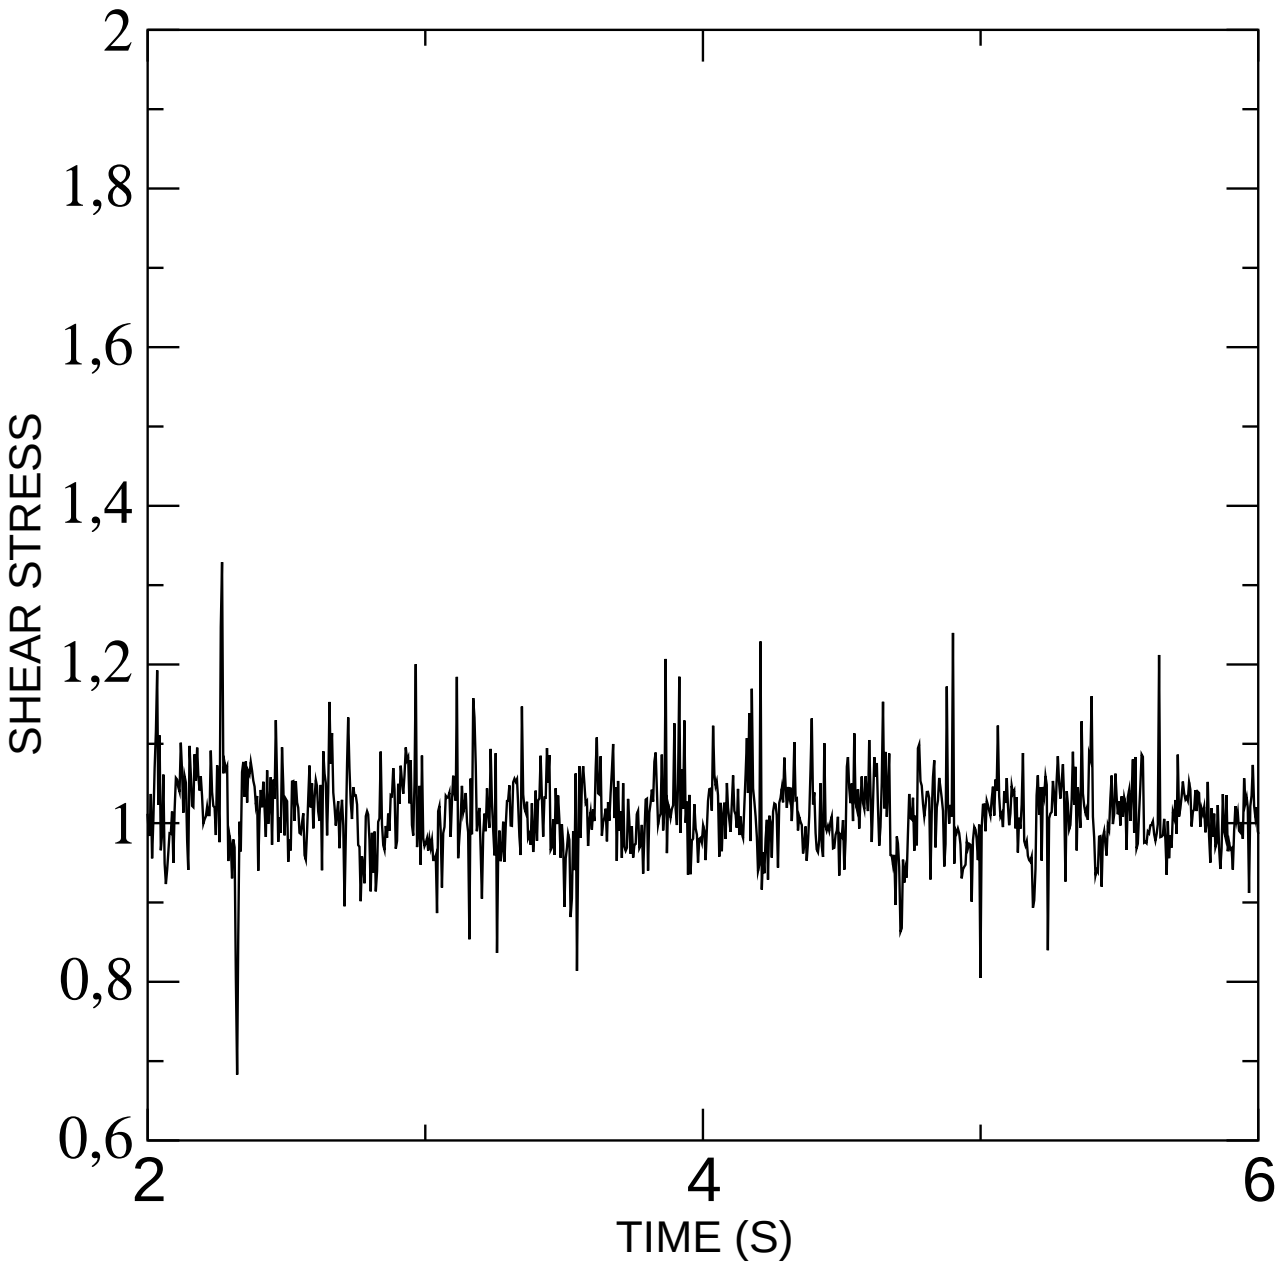

FIG. 2: Stress signal (arbitrary units) as a function of time (in s for a shearing rate $v = 0.2mm/s$

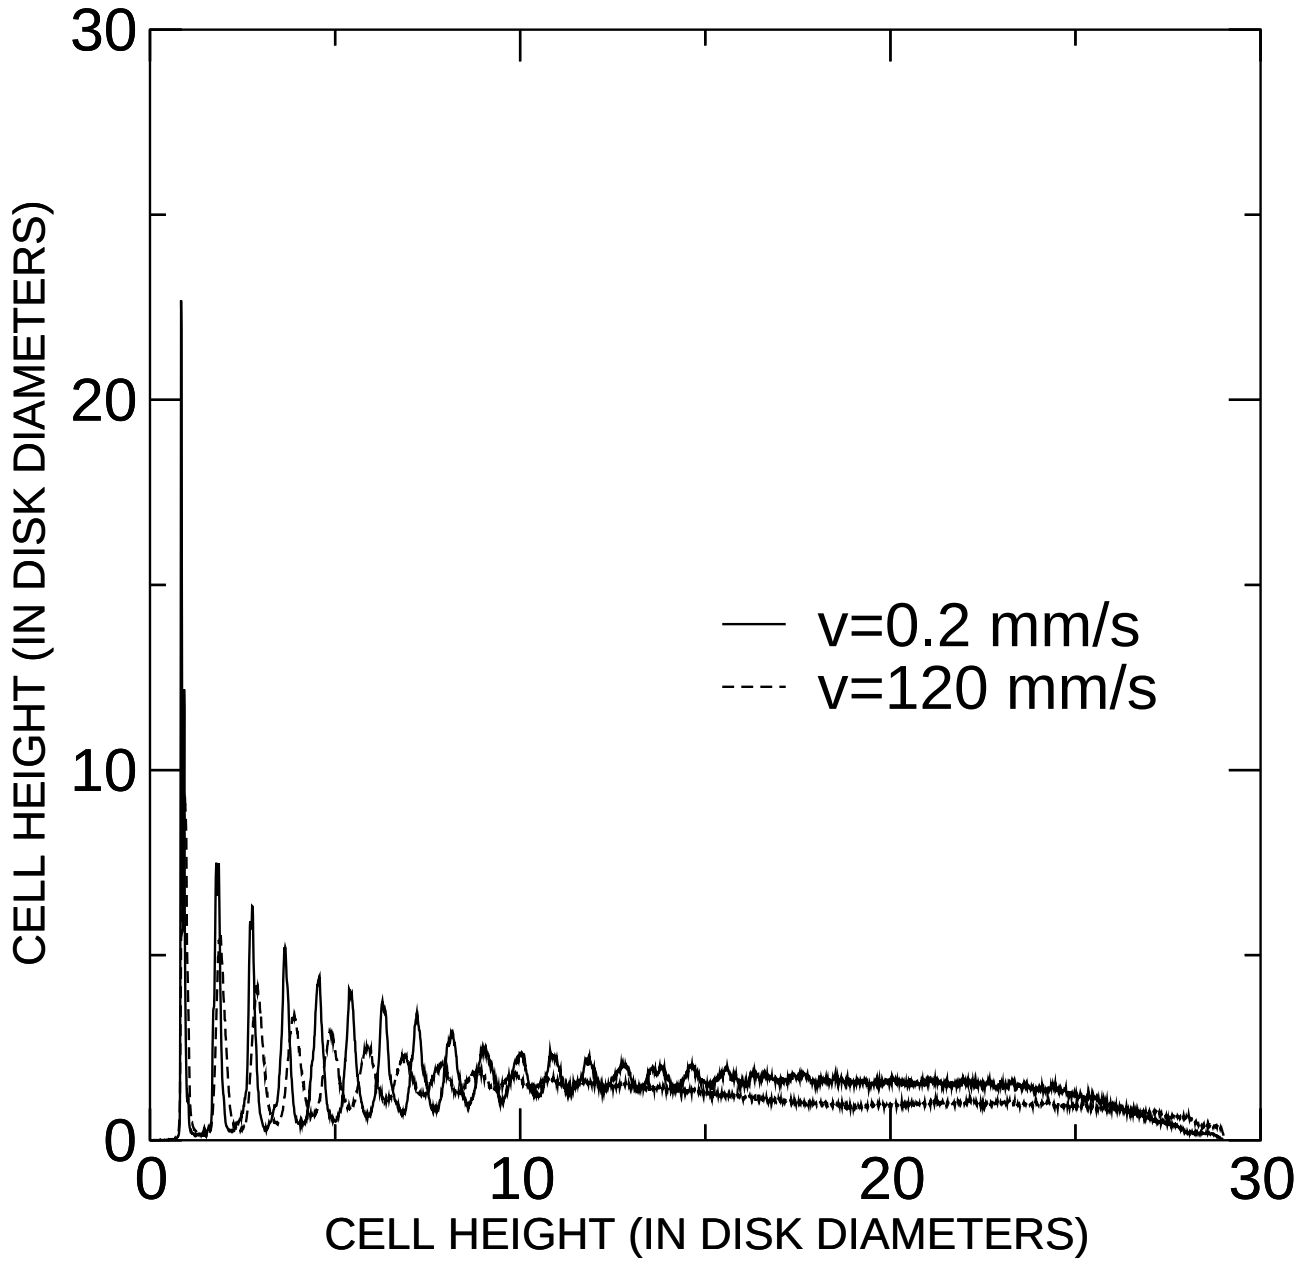

FIG. 3: Horizontal disk densities as a function of the distance (in disk diameters units) to the bottom of the shearing cell , for two shearing velocities $v = 0.2mm/s$ (continuous line) and $v = 120mm/s$ (long dashed line)

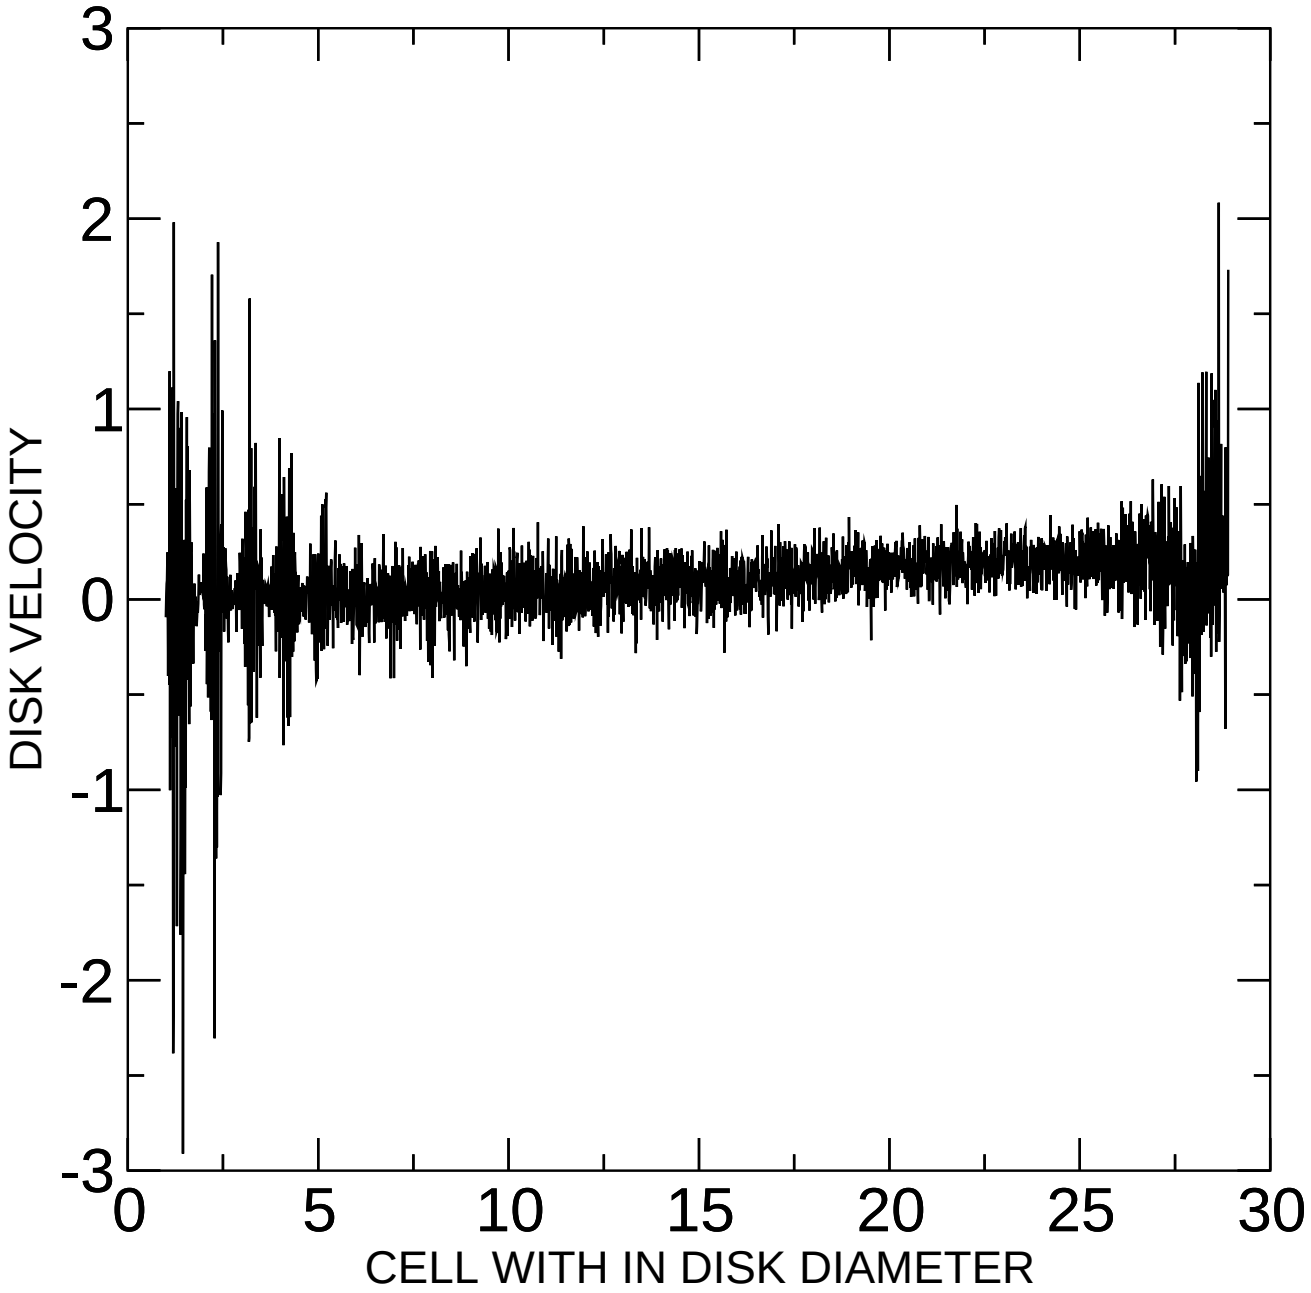

FIG. 4: Horizontal velocities (in mm/s) of the disks as a function of the distance to the bottom of the cell (in disks diameters units) for a shearing rate $v = 0.2mm/s$

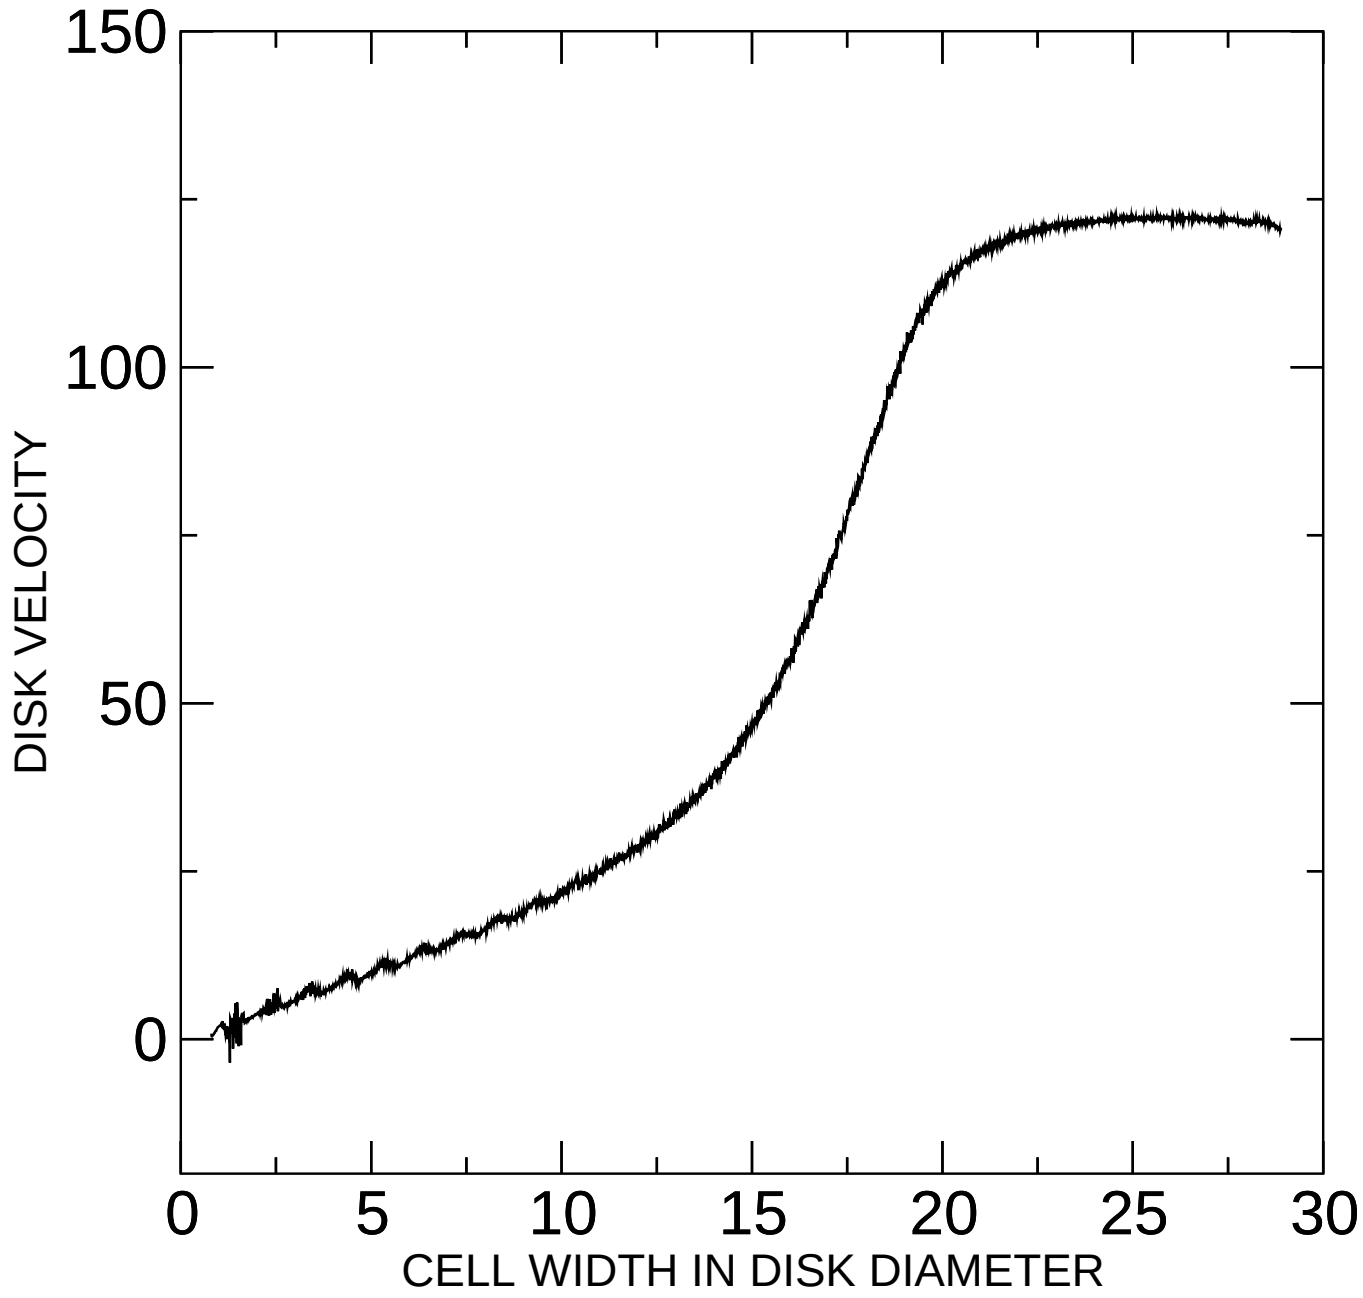

FIG. 5: Velocities (in mm/s) of the disks as a function of the distance to the bottom of the cell (in disks diameters units) for a shearing rate $v = 120mm/s$

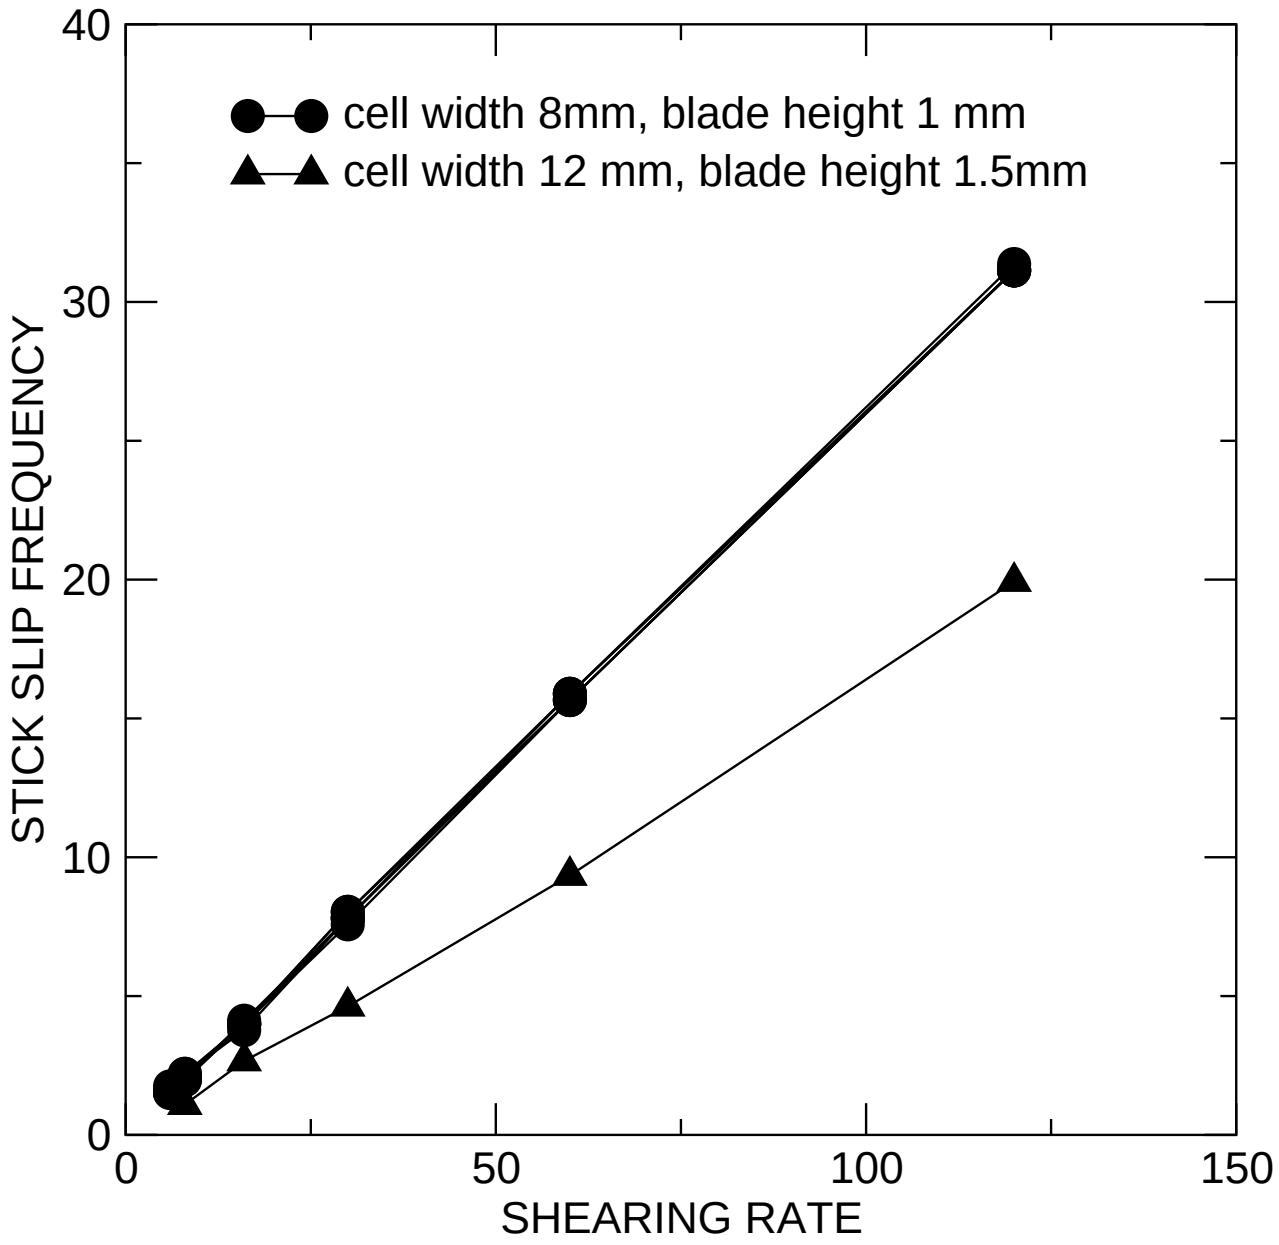

FIG. 6: Characteristic frequencies of the stick slip signal for two simulation box dimensions (width=8mm and height of blades=1mm with 720 disks; width=12mm and height of blades=1.5mm with 1080 disks), as a function of shearing rate.